


BlueSquare 2

BlueSquare 2 is the expansion site for the first BlueSquare building. Located a stone's throw from BlueSquare House, BlueSquare 2 benefits from the same carriers and fibre providers as BlueSquare 1, with the additional benefits of true diversity from the first building. BlueSquare 2 went live in May 2007, at a total size of 7,100 sq ft.

For full specification see overleaf.

BlueSquare Data Group

Technical Building, Priors Way, Maidenhead, Berkshire SL6 2HP
Tel: (+44) 01628 673131 E-Mail: sales@bluesquaredata.com

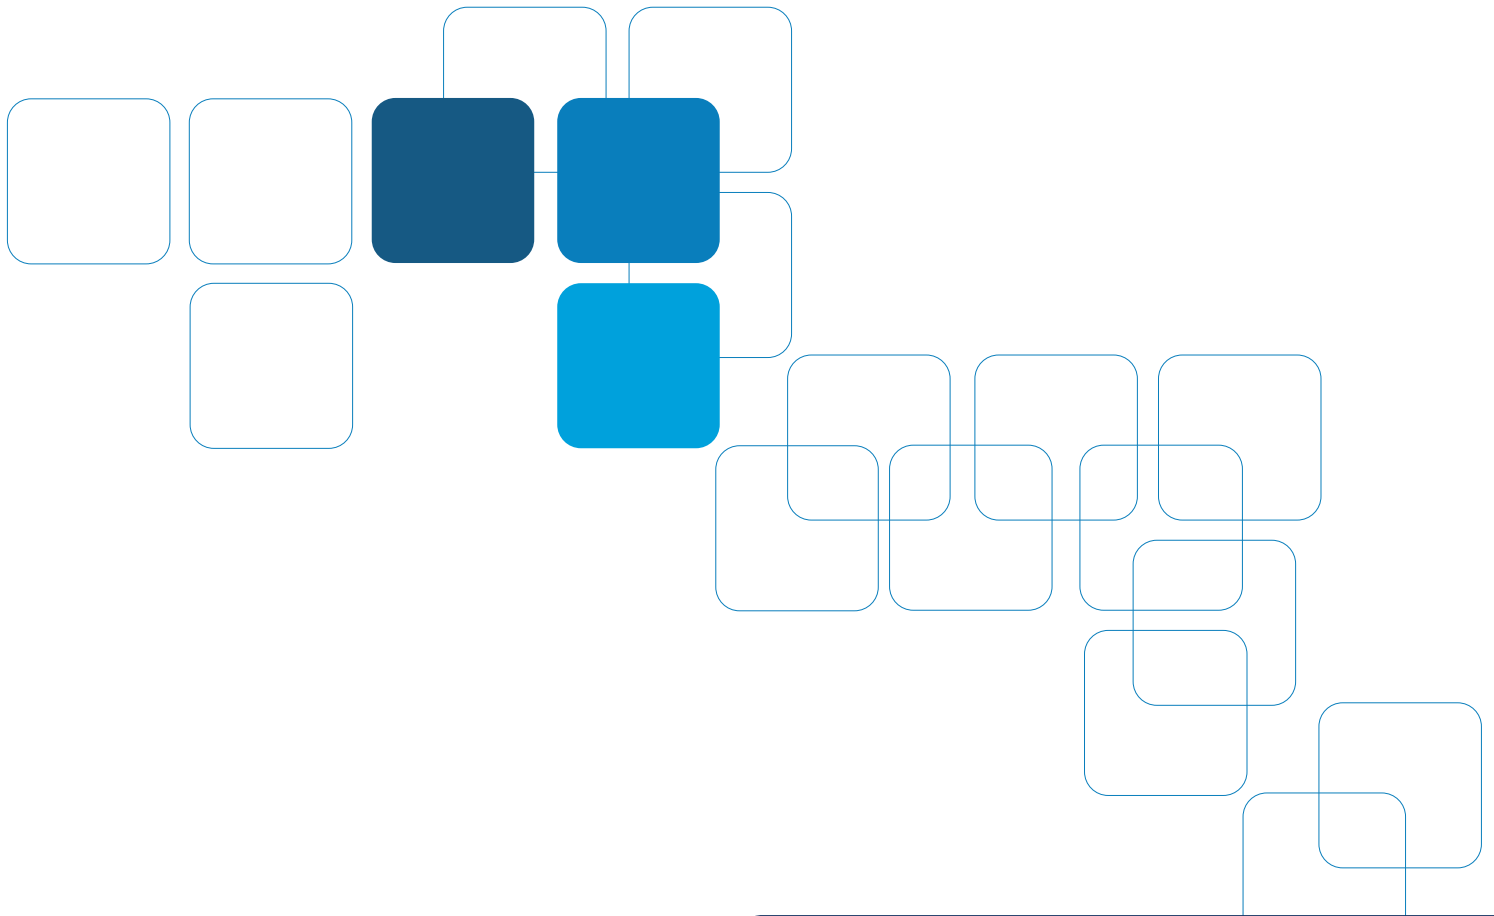


BlueSquare 2

Specification



- 7,100 sq ft total size
- 2 megawatt on-site substation
- Diverse power feeds to substation
- Dual AKSA 1.6 megawatt generator connected via C&N ATS systems
- Two main fibre duct points into building and ducts to BlueSquare 1
- N+1 PowerWave UPS system
- N+1 Airedale Air Handling system
- 22°C +/- 2°C data floor temperature
- Dual 16 Amp feed per equipment rack available
- 24x7 secure entry via swipe card system, with 6-layer entry
- Datacentre located inside its own secure compound, with 3-metre fencing and electric entry, including anti-tailgate systems
- NOC engineers available 24x7 for remote hands service
- Engineer build rooms
- 430mm raised heavy duty flooring
- 20GBit resilient Ethernet ring available to all customers, linking BlueSquare 1, 2, 3 & MK to London Docklands facilities, with 50ms self-healing capacity
- Secure cages from 350 sq ft available with or without racks
- Restrooms and kitchen facilities available

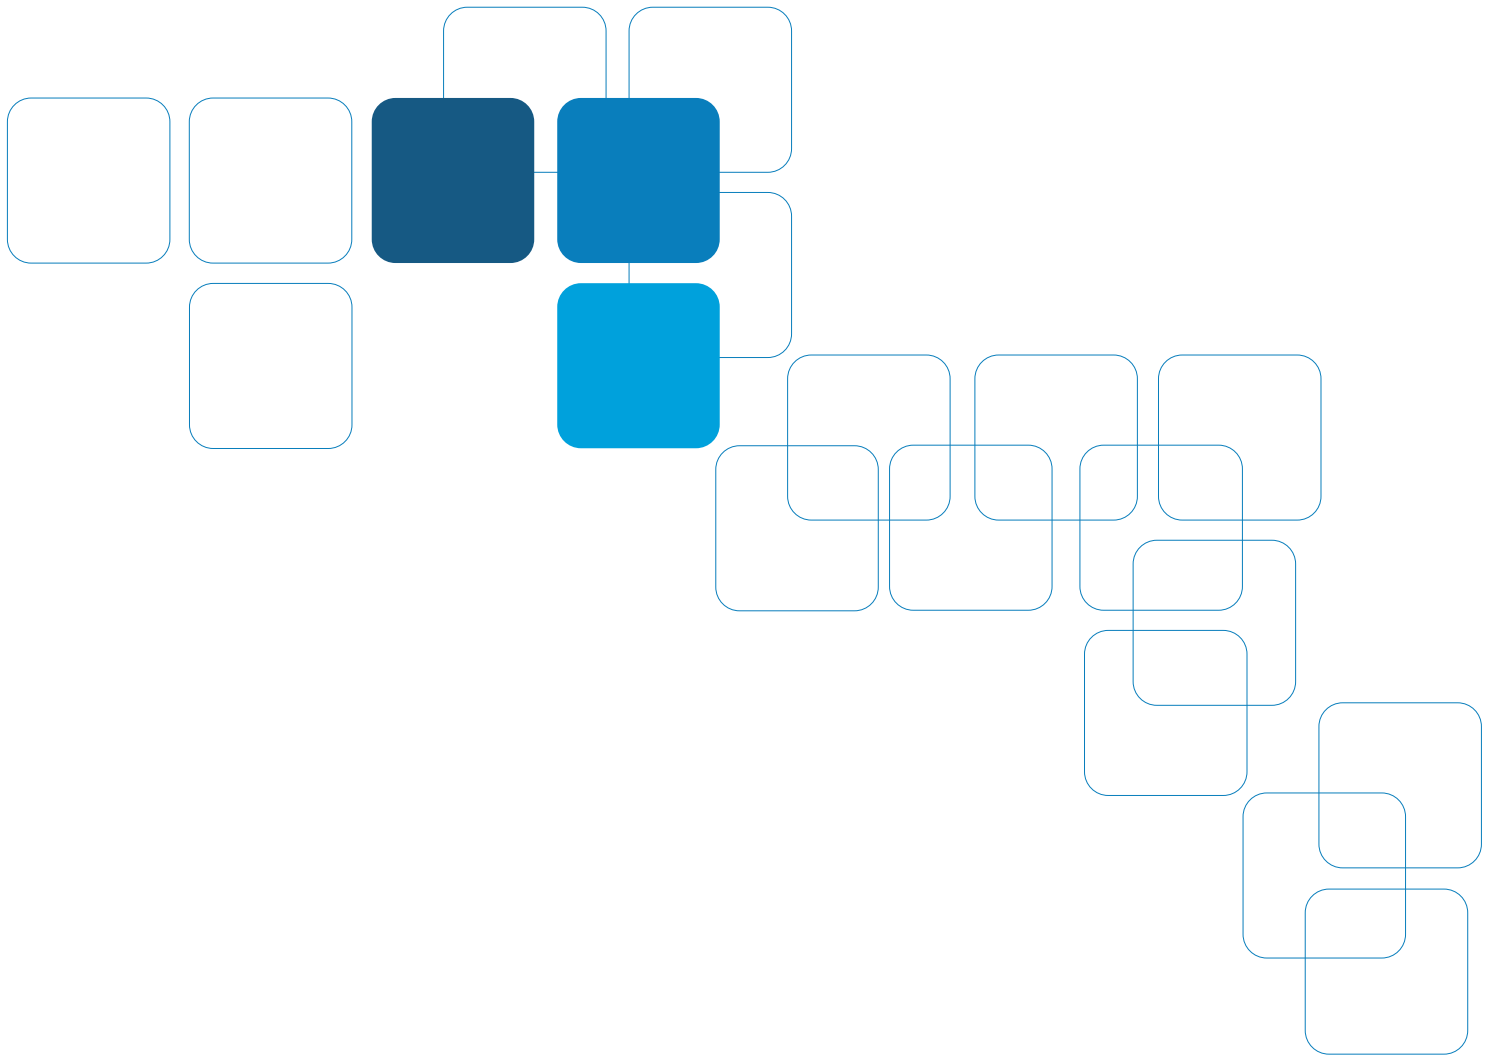

BlueSquare 3


BlueSquare 3 provides an additional two floors of datacentre space adjacent to BlueSquare 2. Built using the same architects, contractors and suppliers as BlueSquare 2, this building replicates our now proven methods of data centre construction.

As with all BlueSquare datacentres, BlueSquare 3 will be linked to our existing datacentres using our redundant fibre ring as well as providing connectivity to other onsite carriers and their incoming ducts.

For full specification see overleaf.

BlueSquare Data Group

Technical Building, Priors Way, Maidenhead, Berkshire SL6 2HP
Tel: (+44) 01628 673131 E-Mail: sales@bluesquaredata.com

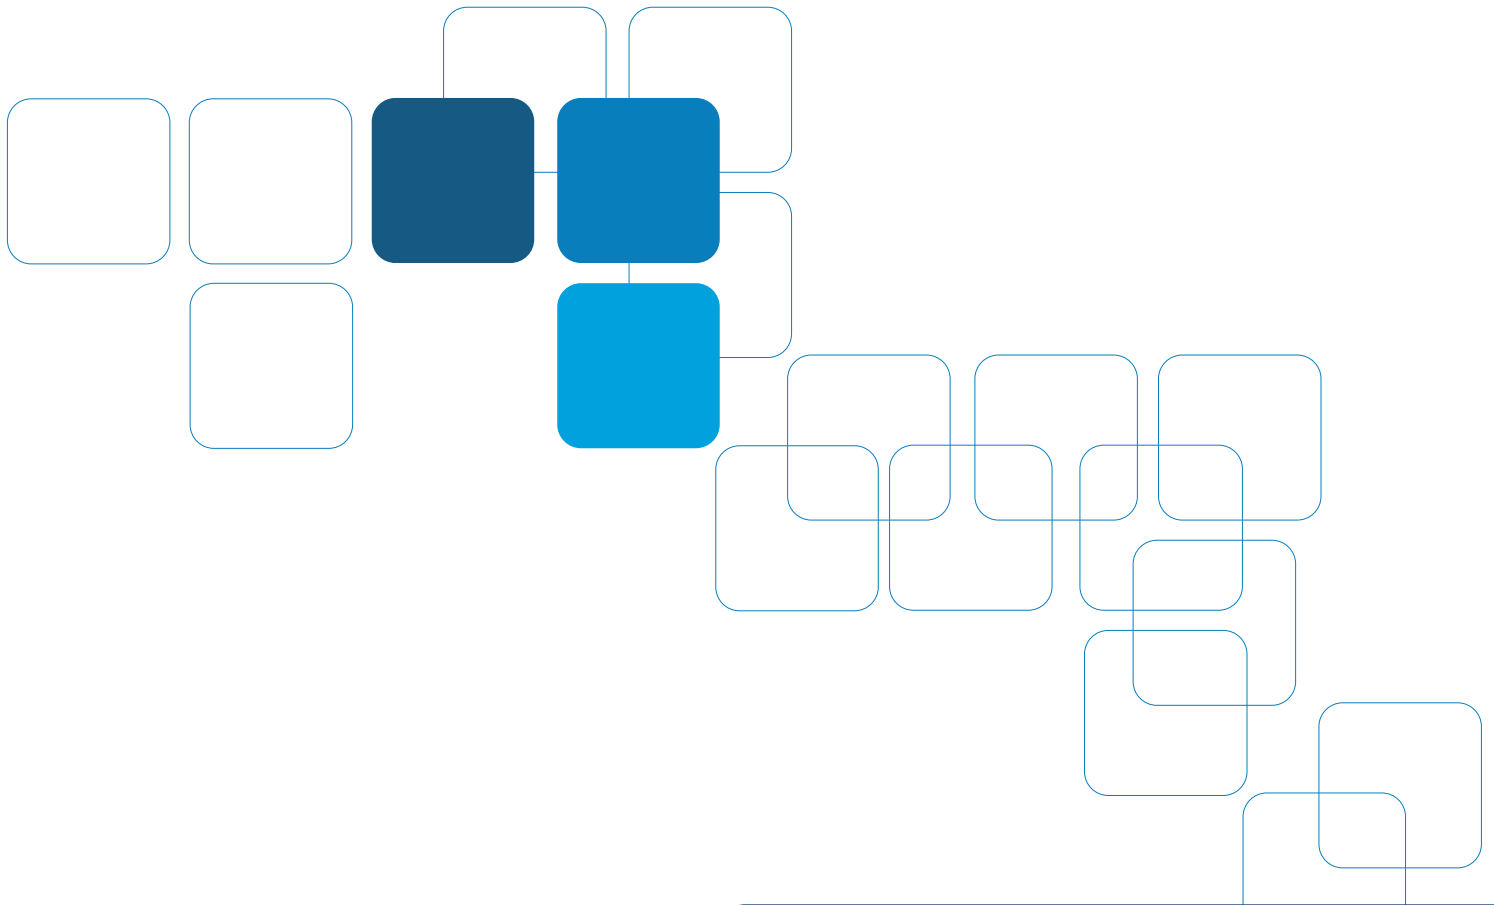

BlueSquare 3



Specification

- 13,000 sq ft total size
- 2 megawatt on-site substation
- Diverse power feeds to substation
- Dual AKSA 1.6 megawatt generator connected via C&N ATS systems
- Two main fibre duct points into building and ducts to BlueSquare 1
- N+1 PowerWave UPS system
- N+1 Airedale Air Handling system
- 22°C +/- 2°C data floor temperature
- Dual 16 Amp feed per equipment rack available
- 24x7 secure entry via swipe card system, with 6-layer entry
- Datacentre located inside its own secure compound, with 3-metre fencing and electric entry, including anti-tailgate systems
- NOC engineers available 24x7 for remote hands service
- Engineer build rooms
- 430mm raised heavy duty flooring
- 20Gbit resilient Ethernet ring available to all customers, linking BlueSquare 1, 2, 3 & MK to London Docklands facilities, with 50ms self-healing capacity
- Secure cages from 350 sq ft available with or without racks
- Restrooms and kitchen facilities available on both floors